


**CURB RAMP TYPE 2
PLAN**

RADIUS (CURB FACE)	A	B	C
20 FEET	4'-5 1/4"	8'-10 1/2"	3'-8 1/2"
30 FEET	3'-10"	7'-8"	3'-2 1/4"
40 FEET	3'-7"	7'-2"	3'-0"
50 FEET	3'-5 1/2"	6'-10 3/4"	2'-10 1/2"
60 FEET	3'-4 1/2"	6'-8 3/4"	2'-9 1/2"
70 FEET	3'-3 3/4"	6'-7 1/2"	2'-9"
80 FEET	3'-3 1/4"	6'-6 1/2"	2'-8 1/2"
90 FEET	3'-2 3/4"	6'-5 1/2"	2'-8 1/4"
100 FEET	3'-2 1/2"	6'-5"	2'-8"


INTERMEDIATE RADII CAN BE INTERPOLATED

NOTES




1. AVOID PLACING DRAINAGE STRUCTURE, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
2. DETECTABLE WARNING PATTERNS MAY BE CREATED BY ANY METHOD THAT WILL ACHIEVE THE TRUNCATED DOME DIMENSIONS AND SPACING SHOWN. THE DETECTABLE WARNING PATTERN AREA SHALL BE YELLOW, IN COMPLIANCE WITH WSDOT STD SPEC. 8-14.3(3).
3. CURB AND GUTTER SHOWN, SEE THE CONSTRUCTION PLANS FOR THE CURB DESIGN SPECIFIED. SEE DRAWING 508.F-1 FOR CURB DETAILS.
4. RAMP SLOPES SHALL NOT BE STEEPER THAN 12H:1V.



	MIN.	MAX.
D	1 5/8"	2 3/8"
E	5/8"	1 1/2"
F	7/16"	3/4"
G	7/8"	1 7/16"



**TRUNCATED DOMES (SEE NOTE 2)
DETECTABLE WARNING
PATTERN DETAIL**

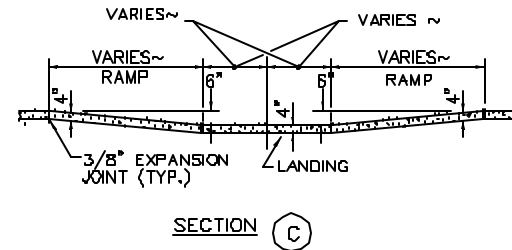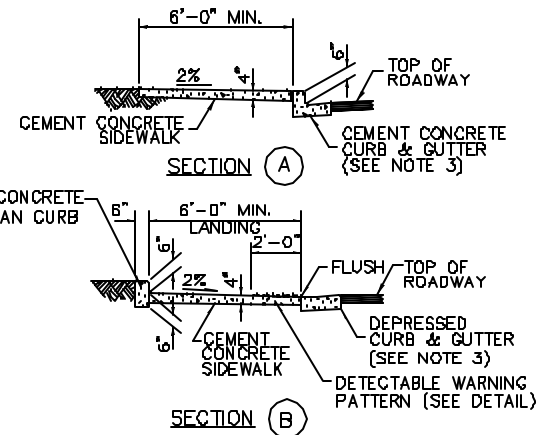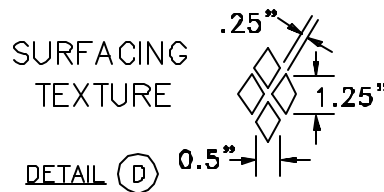

SECTION C