

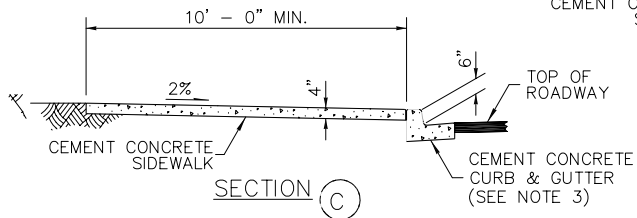
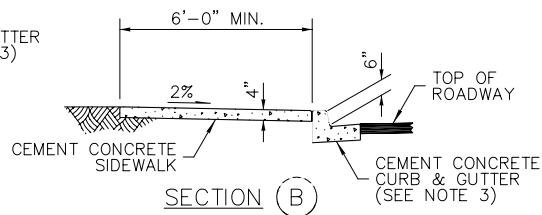


CURB RAMP TYPE 3  
PLAN

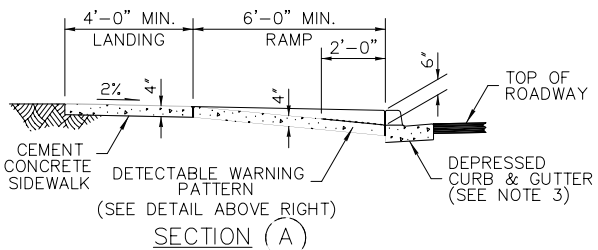

	MIN.	MAX.
A	1 5/8"	2 3/8"
B	5/8"	1 1/2"
C	7/16"	3/4"
D	7/8"	1 7/16"


DETECTABLE WARNING PATTERN AREA SHALL BE YELLOW, IN COMPLIANCE WITH WSDOT STD. PLAN 8-14.3(3)

TRUNCATED DOMES (SEE NOTE 2)  
DETECTABLE WARNING PATTERN DETAIL

NOTES

- FOR USE WITH TWO RAMPS ON SAME RADIUS.
- AVOID PLACING DRAINAGE STRUCTURE, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF ACCESS AREAS.
- DETECTABLE WARNING PATTERNS MAY BE CREATED BY ANY METHOD THAT WILL ACHIEVE THE TRUNCATED DOME DIMENSIONS AND SPACING SHOWN.
- CURB AND GUTTER SHOWN, SEE THE CONSTRUCTION PLANS FOR THE CURB DESIGN SPECIFIED. SEE DRAWING 508.F-1 FOR CURB DETAILS
- RAMP SLOPES SHALL NOT BE STEEPER THAN 12H.:1V..

SURFACING TEXTURE



DETAIL (D)